

LEKTRO


Model AP8850SDA-H AIRCRAFT TOWING VEHICLE FOR AIRCRAFT UP TO 120,000 LBS/54,432 KG

1190 S.E. Flightline Drive, Warrenton, Oregon 97146-9692

1-800-535-8767 • 503-861-2288 • Fax 503-861-2283

E-mail: sales@lektro.com

http://www.lektro.com

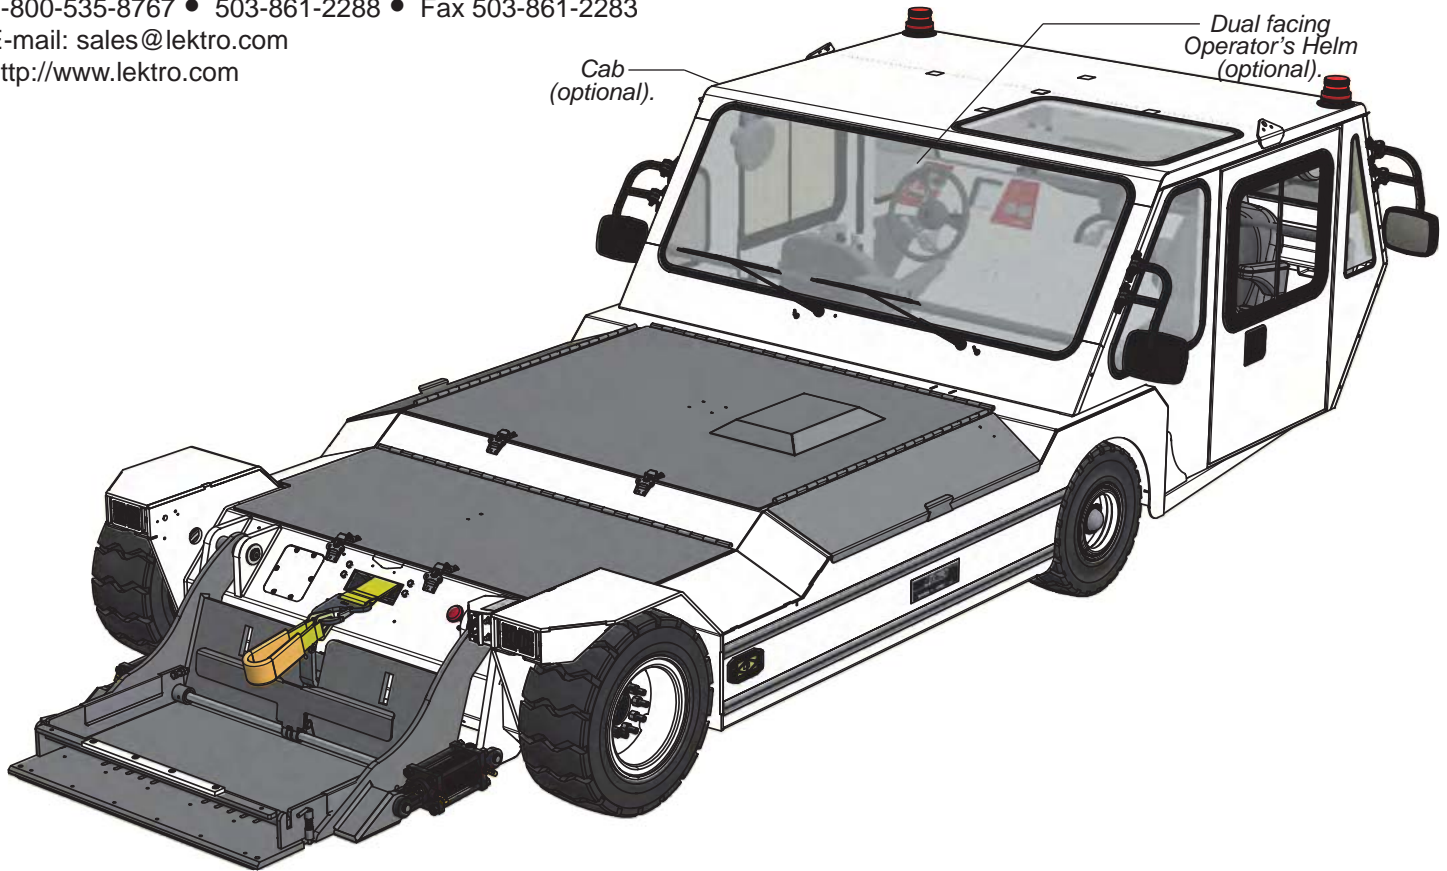

AP8850SDA-H FEATURES:

Hybrid System: Isuzu 993cc Diesel Engine with Polar Power Genset.

Vehicle Drive: 45.3 HP/33.8 kW, 72 VDC Traction Motor mated with Auburn/Dana 44 Differential. Limited Slip Differential, optional.

Motor Speed Control: EVT1000LV IGBT with On-Board Diagnostics. Speed controlled by Foot Throttle.

Batteries: 72 VDC Industrial, 375 AMP-HR Battery (6 hr rate). Single Point Watering System, optional.

GPU: Built-in Independent 12/24/28 VDC / 1175 CCA Batteries and Charging System, optional.

Motive Battery Charger: External Fully Automatic 80 AMP DC / 208-240 VAC / 50-60 Hz / 3-PH Charger.

Nose Gear Lift Cradle: Patented Universal Nose Gear Lift Cradle activated by an Electric/Hydraulic Pump Assembly capable of handling dual and single wheel aircraft, and a Hold Down provision for light-nosed aircraft. Aircraft Selection System and Patented Torque Sensing Turntable Cradle Deck, optional.

Winch: Heavy-duty Hydraulic Winch with Automatic Safety Cut-Off. Winch and Strut Straps included.

Steering: Electric/Hydraulic Power Steering controlled through Automotive-type Tilt Wheel requiring minimal effort with very responsive steering action. Automatic Timer turns off power when tug not in use, increasing battery shift life.

Service Brakes: Foot Operated Hydraulic Disc-Type Service Brakes utilizing the final Wheel Drive Gearing to achieve maximum braking with minimal effort.

Parking Brake: Hand activated Electric Switch controlling Spring Applied/Hydraulic Released Calipers mounted on each Service Brake Disc.

Drive Tires: Single 23 x 10 x 12 18-ply Pneumatic Traction Tread. Spicing, Solid-Pneumatic Tires, Tire Socks and Chains, optional.

Steer Tires: 21 x 8-9 Solid-Pneumatic Traction Tread mounted to a Fully Suspended Steer Axle.

Lighting: Dual Forward and Aft LED Headlights, Four Flashing Amber LED Running Lights and Amber Strobe Light mounted Center Rear. LED Brake Lights/Turn Signals, optional.

Operator's Compartment: Operator and Passenger Seats, Forward Facing, Premium Grade including Armrests (Available in Black or Light Gray). Operator's Seat features a Fully Suspended, Adjustable setting for height, fore/aft and weight. Seat Belts, Dual Facing Operator's Helm and Cab with Heater, Defroster, and Windshield Wipers, optional.

Camera and Monitors: Camera at Aircraft Interface Area, with Color Monitors at "A" and "B" Station, optional.

Construction: Welded Steel Plate and Polymers preserved by Primer and Automotive High-Gloss Red or White Enamel Paint with special protective Polyurethane Coating to prevent rust, scratches and corrosion. Custom colors, optional.

SPECIFICATIONS:

Length	209.5 in / 532.2 cm
Width	98.5 in / 250.2 cm
Height	58.6 in / 148.8 cm
Turning Radius	180 in / 457 cm
Wheel Base	92.4 in / 234.6 cm
Vehicle Speed, Empty	9 MPH / 14.5 KPH
Vehicle Speed, Loaded (To max. Vehicle Capacity)	4 MPH / 6.4 KPH
**Lift Cradle Capacity	12,000 LBS / 5443 KG
Nose Gear Cradle Lifting Height	9 in / 23 cm
Ground Clearance	5 in / 12.7 cm
Shipping Weight w/o Batteries & Charger	5330 LBS / 2418 KG
Shipping Weight w/ Motive Batteries & Charger	9300 LBS / 4218 KG
Shipping Weight w/ Motive & GPU Batteries & Charger	9650 LBS / 4377 KG

**Lift Capacity is calculated with 20 in / 51 cm diameter aircraft tire in lift cradle. Aircraft tire center line at 23 in / 58 cm from drive tire center line.

ADDITIONAL OPTIONS:

Draw Bar Pin, Specialized Aircraft Towing Adapters and Custom Highlift Adapters are available (consult factory). Illustration may show some optional equipment.

*LEKTRO reserves the right to make changes and improvements in products and specifications without notice or obligation.

PATENT Nos. 5,151,003 / 5,302,075 / 9,067,691.

Other Patents Pending.

LEKTRO

Model AP8850SDA-H AIRCRAFT TOWING VEHICLE FOR AIRCRAFT UP TO 120,000 LBS/54,432 KG

1190 S.E. Flightline Drive, Warrenton, Oregon 97146-9692

1-800-535-8767 • 503-861-2288 • Fax 503-861-2283

E-mail: sales@lektro.com

<http://www.lektro.com>

